



LUMINOR™ BLACKCOMB

HO 4.1

CONTROL YOUR OWN WATER QUALITY!

Models: LBH4-051, LBH4-101, LBH4-151,
LBH4-251, LBH4-401

If you are unsure of the microbiological quality of your source water or if you are looking for additional security from your municipal water source, then LUMINOR has the solution in the BLACKCOMB-HO 4.1 series of UV systems.

UV technology is proven to control microbiological (bacteria & virus) issues in water including *E.coli*, *Cryptosporidium* and *Giardia lamblia*.

Designed for easy do-it-yourself installation, a BLACKCOMB-HO 4.1 system is typically installed at the point-of-entry, treating all the water coming into the home.

Product Features

- Now available with integral lamp life monitor, with both audible and visual indication of lamp life
- Axial flow, 316L stainless steel polished reactors,
- Visual sight port for "lamp-on" verification
- Designed & manufactured to ASME pressure vessel standards
- Flow rates stated at 95% UVT at a dose of 30mJ/cm²
- True gland seal retaining nut with positive stop
- User friendly bayonet style lamp connector (quick ¼ turn removal with no extra tools needed)
- Reliable, industry proven, proprietary low pressure high output (LP-HO) coated UV lamps with ceramic bases for durability and long life (10,000 hours)
- Constant current electronic controller (one controller for all systems) in a splash proof case, fully potted ballast virtually eliminates common water damage issue
- Audible & visual lamp failure indicators
- Tactile selector button

Point-of-Use (POU)

LBH4-05 series, for flow rates of 19 lpm (5 gpm)

Point-of-Entry (POE)

LBH4-10 series, for flow rates of 38 lpm (10 gpm)


LBH4-15 series, for flow rates of 57 lpm (15 gpm)

LBH4-25 series, for flow rates of 95 lpm (25 gpm)


LBH4-40 series, for flow rates of 151 lpm (40 gpm)



Typical POE Installation

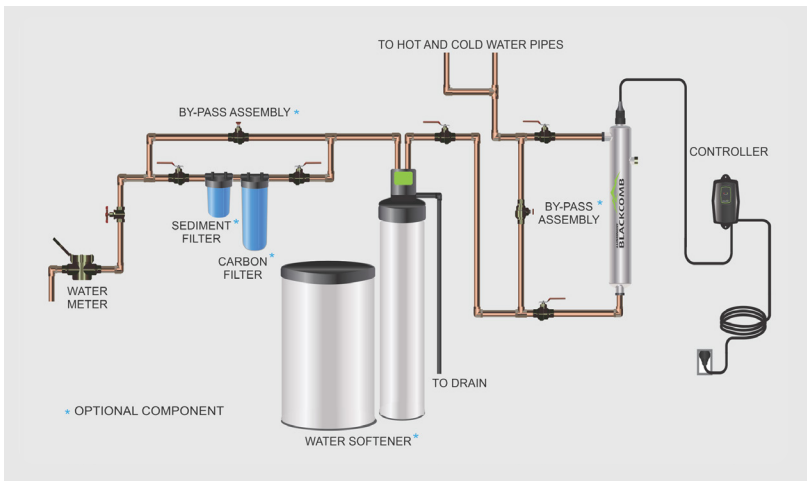

Typical POU Installation

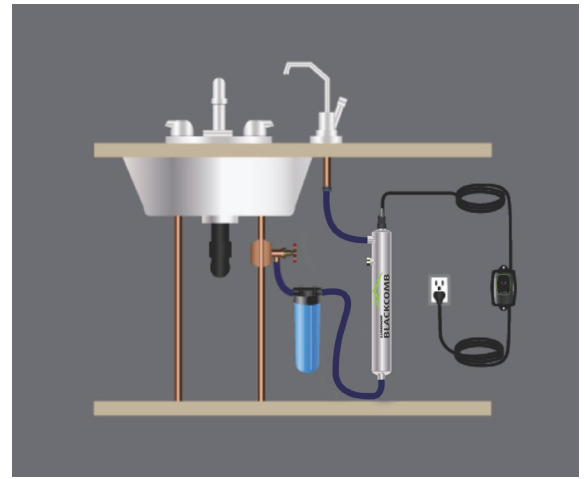

BLACKCOMB 4.1 HO - Equipment Specifications

BLACKCOMB-HO, Residential UV Systems, Lamp countdown

Model	LBH4-051	LBH4-101	LBH4-151	LBH4-251	LBH4-401
Flow Rate (30mJ/cm ² @ 95% UVT)	5 GPM	10 GPM	15 GPM	25 GPM	40 GPM
	18.9 lpm	37.9 lpm	57 lpm	95 lpm	151 lpm
	1.1 m ³ /hr	2.3 m ³ /hr	3.4 m ³ /hr	5.7 m ³ /hr	9.3 m ³ /hr
Flow Rate (16mJ/cm ² @ 95% UVT)	8 GPM	19 GPM	27 GPM	47 GPM	78 GPM
	30.3 lpm	71.9 lpm	102.2 lpm	178 lpm	295 lpm
	1.8 m ³ /hr	4.3 m ³ /hr	6.1 m ³ /hr	10.7 m ³ /hr	17.7 m ³ /hr
Flow Rate (40mJ/cm ² @ 95% UVT)	3 GPM	7 GPM	11 GPM	19 GPM	31 GPM
	11.4 lpm	26.5 lpm	41 lpm	72 lpm	117 lpm
	0.7 m ³ /hr	1.6 m ³ /hr	2.5 m ³ /hr	4.3 m ³ /hr	7.0 m ³ /hr
Port Size	1/2" MNPT	3/4" MNPT	1" MNPT	1" MNPT	1 1/2" MNPT
Electrical	90-265V/50-60Hz. (IEC power cord required)				
Plug Type	American, Nema 5/15, 3 wire for all 110V systems, "1" suffix (i.e. LBH4-101) European, CEE 7/7, 3 wire for all 230V systems, "2" suffix (i.e. LBH4-102) British Standard, BS 1363, 3 wire for all 230V systems, "3" suffix (i.e. LBH4-103) Australian/New Zealand, AS/NZ 3112, 3 wire for all 230V systems, "4" suffix (i.e. LBH4-104)				
Lamp Watts	18	34	45	67	101
Power (Watts)	20 (19 @ 230V)	38 (36 @ 230V)	57 (48 @ 230V)	73 (72 @ 230V)	115 (108 @ 230V)
Replacement Lamp	RL-210HO	RL-330HO	RL-420HO	RL-600HO	RL-950HO
Replacement Sleeve	RQ-210	RQ-330	RQ-420	RQ-600	RQ-950
Chamber Material	316L Stainless Steel, A249 Pressure Rated Tubing, Polished & Passivated				
Reactor Dimensions	3.5 x 11.7" (8.9 x 29.8cm)	3.5 x 16.5" (8.9 x 41.8cm)	3.5 x 20.0" (8.9 x 50.8cm)	3.5 x 26.9" (8.9 x 68.3cm)	3.5 x 40.7" (8.9 x 103.4cm)
Controller Dimensions	21.7 x 10.8 x 10.2 cm (8.6 x 4.2 x 4")				
Operating Pressure	0.7-10.3 bar (10-150 psi)				
Operating Water Temperature	2-40° C (36-104° F)				
Lamp Change Reminder	YES (4-digit LED display)				
Visual Lamp Out Indicator	YES				
Audible Lamp Out Indicator	YES				
Shipping Weight	4.5 kg (9.9 lbs)	5.4 kg (11.9 lbs)	6.0 kg (13.2 lbs)	7.1 kg (15.7 lbs)	9.5 kg (21.0 lbs)

Conditions For Use

Your system will provide years of use provided the system is maintained on a regular basis as per the specifications outlined in the Owner's Manual. For the following system to perform as tested, the following water quality parameters must be met.

Parameter	Level
Hardness	< 120 mg/L (7 gpg)
Iron (Fe)	< 0.3 mg/L (ppm)
Manganese (Mn)	< 0.05 mg/L (ppm)
Tannins	< 0.1 mg/L (ppm)
Turbidity	< 1 NTU
Transmittance	> 75% UVT

For levels outside those specified in the table above, please contact the factory for further technical assistance.

Manufacturer's Warranty

REACTORS - Ten (10) year Limited Warranty
ELECTRONICS - Three (3) year Limited Warranty
UV LAMPS - One (1) year Limited Warranty
QUARTZ SLEEVES - One (1) year Limited Warranty



See website for LUMINOR's complete warranty document including conditions and exclusions.

LUMINOR Environmental Inc.

80 Southgate Drive, Unit 4
 Guelph, Ontario, CANADA
 N1G 4P5

P: (519) 837-3800

TF: (855) 837-3801

F: (519) 837-3808

e-mail: info@luminoruv.com

web: www.luminoruv.com



WaterMark
 Certification
 Available



EPA Establishment
 #088776-CAN-001



Carbon
 Neutral

MEMBER



LuminorUV



LuminorUV